


## Single Phase String Inverter

### X1-Air



**Simple.**  
**Reliable.**  
**Efficient**

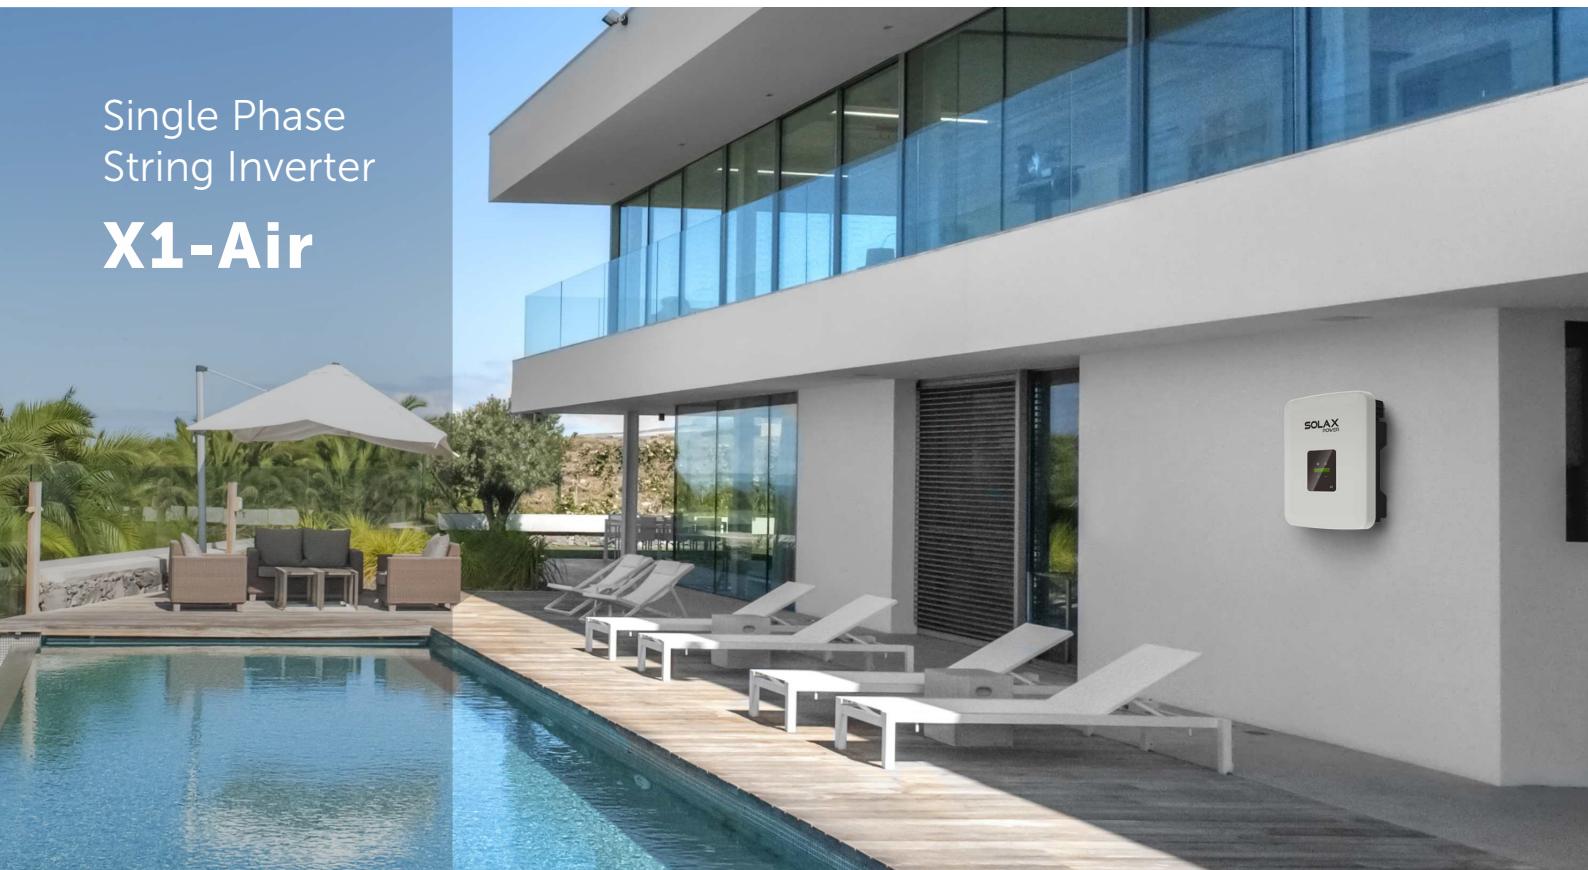

High Efficiency



Wide Voltage Range



Remote Monitoring



IP65 Rated

2.5kW

3kW

3.3kW

### X1-2.5-S-N / X1-3.0-S-N / X1-3.3-S-N

SolaX have developed a range of single phase inverters unrivalled in the industry for their quality, reliability and efficiency. The SolaX single phase inverters boast a wide MPPT voltage range to allow for more energy harvesting and have a maximum input voltage of 580V, with a maximum efficiency of 97.6%. In addition, SolaX single phase inverters are IP65 rated, have no internal fan and come with optional 'plug & play' WIFI.





# X1-AIR (SINGLE PHASE)

	X1-2.5-S-N	X1-3.0-S-N	X1-3.3-S-N
<b>INPUT (DC)</b>			
Max.PV array power [Wp]	3750	4500	4950
Max.DC voltage [V]	600	600	600
Nominal DC operating voltage [V]	360	360	360
Max. input current [A]	10	10	10
Max. short circuit current [A]	12	12	12
MPPT voltage range[V]	70-580	70-580	70-580
Start operating voltage[V]	80	80	80
No. of MPP trackers	1	1	1
Strings per MPP tracker	1	1	1
<b>OUTPUT AC</b>			
Nominal AC power [VA]	2500	3000	3300
Max. AC power [VA]	2500	3000	3300
Nominal grid voltage(AC voltage range) [V]		220/230/240; 180~280	
Nominal grid frequency/range [Hz]		50/60; ±5	
Nominal AC current [A]	10.8	13.0	14.3
Max. AC current [A]	12	14	15
Displacement power factor		0.8 leading ~ 0.8 lagging	
THDi, rated power [%]		<2	
<b>EFFICIENCY</b>			
MPPT efficiency [%]		99.9	
Euro efficiency [%]		96.8	
Max. efficiency [%]		97.1	
<b>POWER CONSUMPTION</b>			
Standby consumption (Night) [W]		<1	
<b>STANDARD</b>			
Over voltage protection		YES	
Over current protection		YES	
DC isolation impedance monitoring		YES	
Ground fault current monitoring		YES	
DC injection monitoring		YES	
RCD protection		YES	
Safety		EN62109-1/-2	
EMC		EN61000-6-2;EN61000-6-3;EN61000-3-2;EN61000-3-3	
Certification		G98;AS4777;VDE4105; EN50549; CEI0-21	
<b>ENVIRONMENT LIMIT</b>			
Degree of protection(according to IEC60529)		IP65	
Operating temperature range [°C]		-25~+60(de-rating at 45)	
Max. operation altitude [m]		2000	
Humidity [%]		0~100 (condensation)	
Storage temperature [°C]		-25~60	
Typical noise emission [dB]		<25	
<b>DIMENSION AND WEIGHT</b>			
Dimensions(WxHxD) [mm]		323*402*119	
Weight[kg]		10.5	
Cooling concept		Natural	
Topology		Non-isolated	
Communication interfaces		Pocket WiFi(optional)/Pocket LAN(optional)/Pocket GPRS(optional)/Meter(optional)/RS485/DRM/USB-Upgrade	
LCD display		Yes	
Standard warranty [years]		5+5	