



BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-DE09.08

PRODUCT RANGE: 390-405W

405W+

MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.1%

MAXIMUM EFFICIENCY



Outstanding visual appearance

- Designed with aesthetics in mind
- Excellent cell color control by dedicated cell blackening treatment and machine selection.
- Thinner wires that appear all black at a distance



High customer value

- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



High power up to 405W

- Up to 21.1% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

Trina Solar's Backsheet Performance Warranty



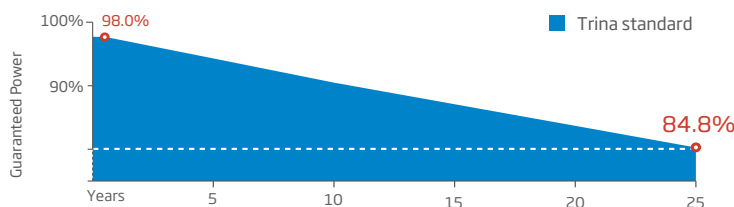


Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System

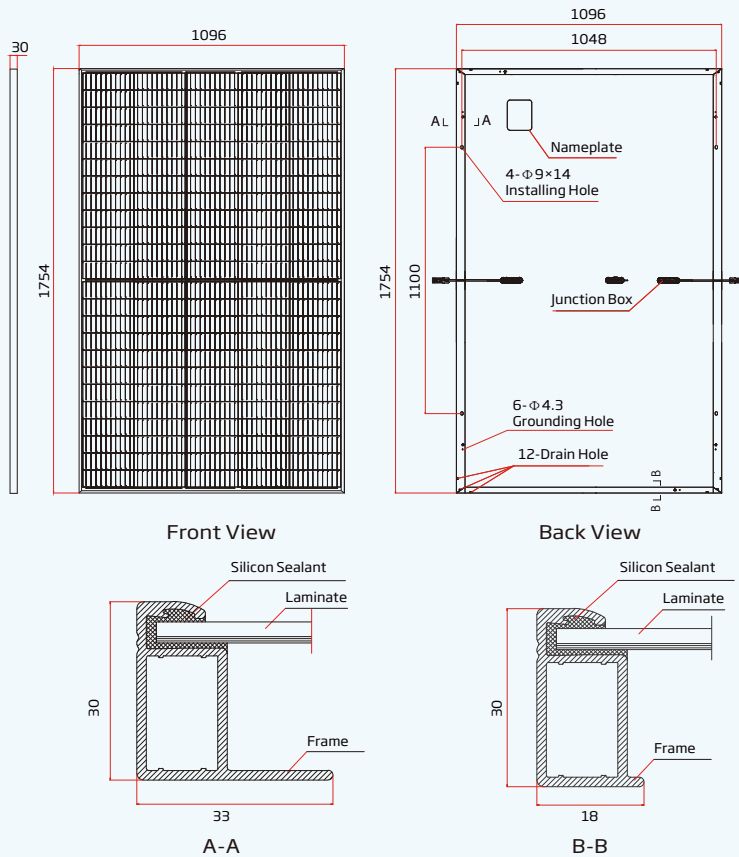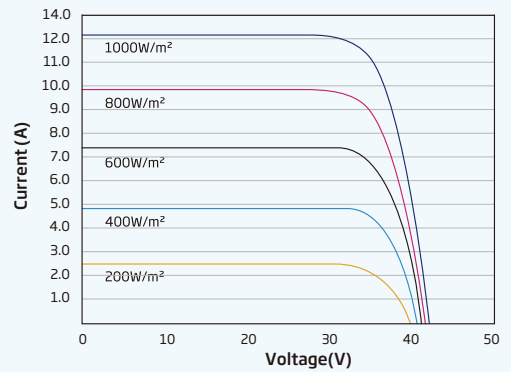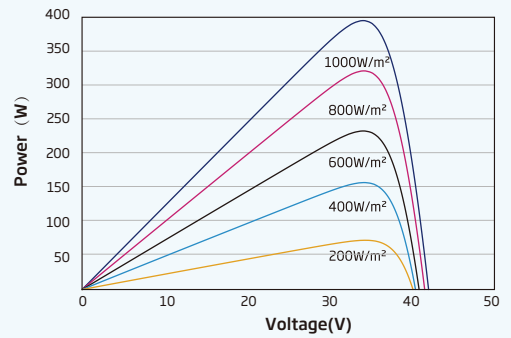

DIMENSIONS OF PV MODULE(mm)

I-V CURVES OF PV MODULE(395 W)

P-V CURVES OF PV MODULE(395W)

ELECTRICAL DATA (STC)

	390	395	400	405
Peak Power Watts- P_{MAX} (Wp)*				
Power Tolerance- P_{MAX} (W)		0 ~ +5		
Maximum Power Voltage- V_{MPP} (V)	33.8	34.0	34.2	34.4
Maximum Power Current- I_{MPP} (A)	11.54	11.62	11.70	11.77
Open Circuit Voltage- V_{OC} (V)	40.8	41.0	41.2	41.4
Short Circuit Current- I_{SC} (A)	12.14	12.21	12.28	12.34
Module Efficiency η_m (%)	20.3	20.5	20.8	21.1

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	295	298	302	306
Maximum Power Voltage- V_{MPP} (V)	31.8	32.0	32.2	32.5
Maximum Power Current- I_{MPP} (A)	9.26	9.32	9.38	9.41
Open Circuit Voltage- V_{OC} (V)	38.4	38.6	38.8	38.9
Short Circuit Current- I_{SC} (A)	9.78	9.84	9.90	9.69

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	1754×1096×30 mm (69.06×43.15×1.18 inches)
Weight	21.3 kg (47.0 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	30mm (1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 1100/1100 mm(43.31/43.31 inches)
Connector	MC4 EVO2 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.34%/°C
Temperature Coefficient of V_{OC}	-0.25%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

WARRANTY

15 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces